
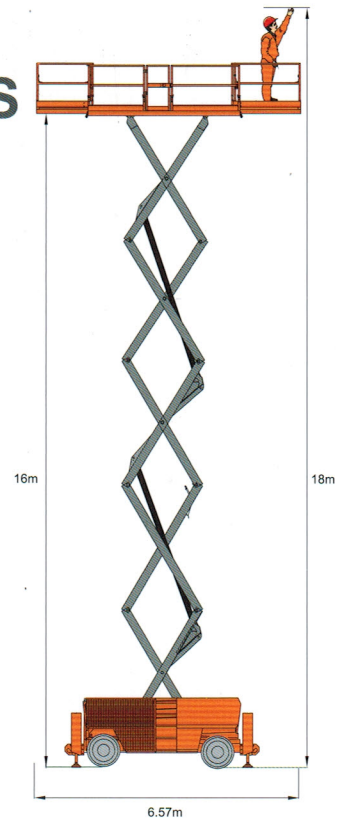


SELF-PROPELLED ROUGH-TERRAIN SCISSOR LIFTS

Summit

SL1623-AWD

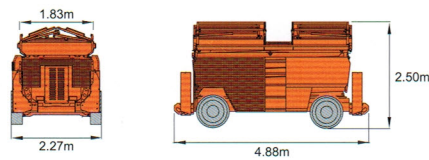

S.W.L	680kg/1500lb
S.W.L On extension	227kg/500lb
Maximum workers number	7



Working height	18.00m/59ft1in
Platform floor height	16.00m/52ft6in



Overall length	4.88m/16ft0.1in
Overall width	2.27m/7ft5in
Overall height	3.15m/10ft4in
Platform size	3.98x1.83m/13ft0.6inx6ft
Platform extension size	6.57 x1.83m/21ft6inx6ft
Ground clearance	0.22m/8in
Wheelbase	2.86m/9ft4in
Turning radius	
Inside/Outside	2.04/5.20m 6ft8in/17ft0.7in



Engine	
Kubota V2403-M-DI	34kw/2400rpm



Travel speed	
Stowed	6 km/h
Raised	1.1 km/h
Up/Down speed	114/94 sec



Gradeability	40%
Maximum slope	2-3°



Hydraulic tank	130 L
Diesel tank	100 L



Tyres (solid)	33X12-20
----------------------	----------



Weight	8700kg/19180lb
---------------	----------------

Standard equipment

- Can Bus Technology
- Proportional controls
- Two self-closing gates
- 4WD
- Oscillating axle
- Slide-out engine tray
- Tilt protection
- Tilt alarm
- Horn
- Hour meter
- Safety electric pump
- Fault indication on platform
- Anti-restart engine protection
- The glow plugs for cold starting
- Two extended platforms
- Flashing beacons
- European III emission engine
- Automatic leveling hydraulic outriggers
- Hydraulic oil cooler
- AC power on the platform
- Non marking tyres

Options

- Hydraulic generator
- Hydraulic welder
- Hydraulic compressor
- Hydraulic water pump
- Platform work lights

