
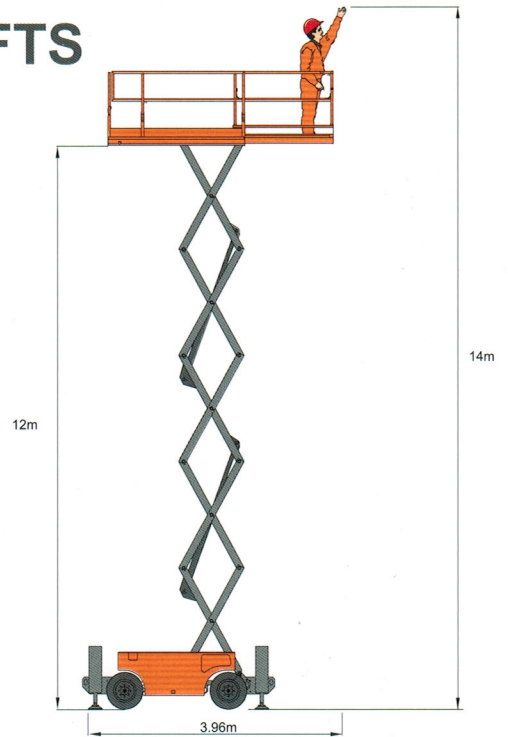



SELF-PROPELLED ROUGH-TERRAIN SCISSOR LIFTS

Summit

SC1217-AWD



S.W.L	345kg/760lb
S.W.L on extension	136kg/300lb
Maximum workers number	3



Working height	14.0m/45ft11in
Platform floor height	12.0m/39ft4in



Overall length	3.38m/11ft1in
Overall width	1.73m/5ft8in
Overall height(Rails up)	2.58m/8ft5in
Overall height(Rails down)	1.95m/6ft4in
Platform size	2.51X1.55m/8ft2inx5ft1in
Platform extension size	1.45m/4ft9in
Ground clearance	0.19m/7in
Wheelbase	1.85m/6ft0.8in
Turning radius(Inside)	1.52m/4ft12in
Turning radius(Outside)	3.68m/12ft0.8in



Engine	D1105 18.6kw/2400rpm
--------	----------------------



Travel speed(Stowed)	6.1km/h
Travel speed(Raised)	0.8km/h
Up/Down speed	50/ 40 sec



Gradeability	30%
Maximum working slope	2 - 3 °



Hydraulic tank	62.5L
Diesel tank	56.8L



Tyres(foam- filled)	26in
---------------------	------



Weight	4180kg/9215lb
--------	---------------

Standard equipment

- Proportional controls
- Self-lock gate on platform
- Drivable at full height
- Non marking tyres
- 4WD
- Automatic brakes system
- Swing-out engine tray
- Safety electric pump
- Emergency stop buttons
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- Anti-restart engine protection
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Folding guardrails
- Extended platform
- Charger protection
- European III emission engine
- Flashing Beacon
- Automatic leveling hydraulic outriggers
- AC power on the platform
- Hydraulic oil cooler
- Non marking tyres

Options

- Platform work lights
- Airline to the platform
- Hydraulic generator

