
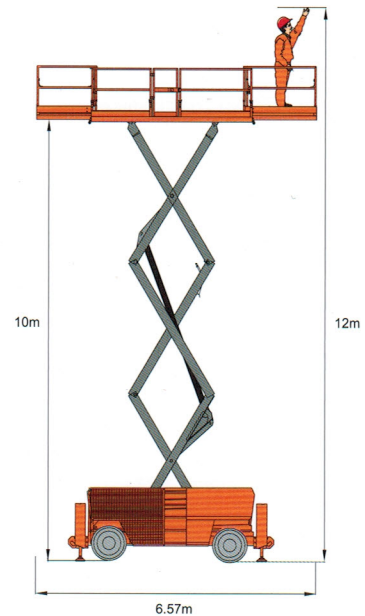


# SELF-PROPELLED ROUGH-TERRAIN SCISSOR LIFTS

# Summit

## SL1023-AWD

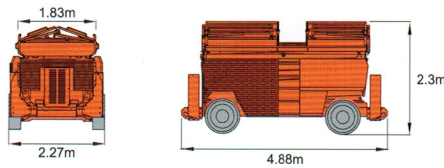

	<b>S.W.L</b>	1000kg/2204lb
	<b>S.W.L On extension</b>	227kg/500lb
	<b>Maximum workers number</b>	7

	<b>Working height</b>	12.00m/39ft4in
	<b>Platform floor height</b>	10.00m/32ft9in

	<b>Overall length</b>	4.88m/16ft0.1in
	<b>Overall width</b>	2.27m/7ft5in
	<b>Overall height</b>	2.98m/9ft9in
	<b>Platform size</b>	3.98x1.83m/13ft0.6inx6ft
	<b>Platform extension size</b>	6.57 x1.83m/21ft6inx6ft
	<b>Ground clearance</b>	0.22m/8in
	<b>Wheelbase</b>	2.86m/9ft4in
	<b>Turning radius</b>	
	Inside/Outside	2.04/5.20m 6ft8in/17ft0.7in

	<b>Engine</b>	
	Kubota V2403-M-DI	34kw/2400rpm

	<b>Travel speed</b>	
	Stowed	6 km/h
	Raised	1.1 Km/h
	<b>Up/Down speed</b>	45/29 sec

	<b>Gradeability</b>	50%
	<b>Maximum slope</b>	2-3°

	<b>Hydraulic tank</b>	130 L
	<b>Diesel tank</b>	100 L

	<b>Tyres (solid)</b>	33X12-20
--	----------------------	----------

	<b>Weight</b>	7300kg/16093lb
--	---------------	----------------

### Standard equipment

- Can Bus Technology
- Proportional controls
- Two self-closing gates
- 4WD
- Oscillating axle
- Slide-out engine tray
- Tilt protection
- Tilt alarm
- Horn
- Hour meter
- Safety electric pump
- Fault indication on platform
- Anti-restart engine protection
- The glow plugs for cold starting
- Two extended platforms
- Flashing beacons
- European III emission engine
- Automatic leveling hydraulic outriggers
- Hydraulic oil cooler
- AC power on the platform
- Non marking tyres

### Options

- Hydraulic generator
- Hydraulic welder
- Hydraulic compressor
- Hydraulic water pump
- Platform work lights

